




JCR SERIES Compression Riveters

Alligator & C-Yoke Type Compression Riveters

Designed by a former aircraft manufacturing engineer, these rugged and reliable pneumatic rivet squeezers are the most powerful and lightweight in the industry.

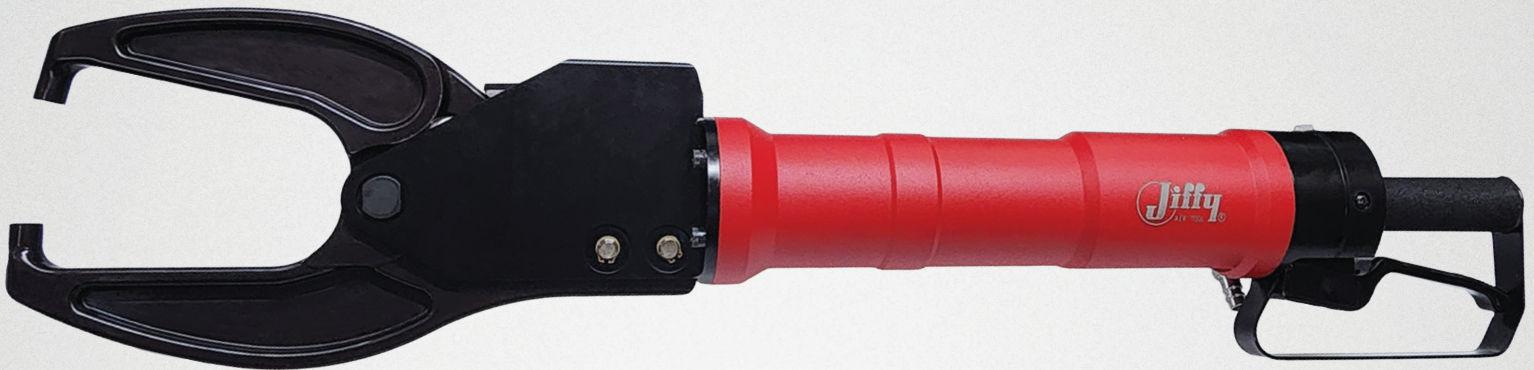

ALLIGATOR JAW SET



BIKE HANDLE THROTTLE

- Extreme-duty bearings in the Alligator & C-Yoke rivet head assemblies
- Lighter than comparable large tandem & triple cylinder compression riveters
- Modular design across compatible cylinder diameters and wedge allow quick change of rivet head assemblies to longer or shorter jaw/yoke reaches

- Ergonomic body with lightweight & comfortable "B" valve handle design
- Patented design tested under load for > 250,000 cycles
- Feather-touch control on Alligator Jaw/C-Yoke set holder stroke - not uncontrollably rapid like other compression riveters



1-800-828-8665 ♦ jiffyairtool.com
2254 Conestoga Dr. Carson City, NV. 89706



JCR SERIES

Compression Riveters

STANDARD ALLIGATOR COMPRESSION RIVETERS

PART #	JAW REACH (INCHES/MM)	COMPRESSIVE FORCE @ 90 PSI/6.2 BAR (IN LBF/KN)	RIVET CAPACITY (2117 AD ALUM.)	VALVE STYLE	SET HOLE SIZE (IN/MM)	WEIGHT WITH JAWS (LBS/KG)	OVERALL LENGTH (INCHES/CM)
JCR750A3-6A	3" / 76.2	7,200 lbf / 32 kN	1/4" / 6.35 mm	Over cylinder	3/16" / 4.76	9 lbs / 4.08 kg	19.8" / 50.3
JCR750A3-6B	3" / 76.2	7,200 lbf / 32 kN	1/4" / 6.35 mm	Bike	3/16" / 4.76	10 lbs / 4.54 kg	24.0" / 61.0
JCR750A3-8A	3" / 76.2	7,200 lbf / 32 kN	1/4" / 6.35 mm	Over cylinder	1/4" / 6.35	9 lbs / 4.08 kg	19.8" / 50.3
JCR750A3-8B	3" / 76.2	7,200 lbf / 32 kN	1/4" / 6.35 mm	Bike	1/4" / 6.35	10 lbs / 4.54 kg	24.0" / 61.0
JCR750A5-6A	5" / 127	5,100 lbf / 22.7 kN	3/16" / 4.76 mm	Over cylinder	3/16" / 4.76	9.5 lbs / 4.31 kg	21.8" / 55.4
JCR750A5-6B	5" / 127	5,100 lbf / 22.7 kN	3/16" / 4.76 mm	Bike	3/16" / 4.76	10.5 lbs / 4.76 kg	26.0" / 66.0
JCR750A5-8A	5" / 127	5,100 lbf / 22.7 kN	3/16" / 4.76 mm	Over cylinder	1/4" / 6.35	9.5 lbs / 4.31 kg	21.8" / 55.4
JCR750A5-8B	5" / 127	5,100 lbf / 22.7 kN	3/16" / 4.76 mm	Bike	1/4" / 6.35	10.5 lbs / 4.76 kg	26.0" / 66.0
JCR950A3-6B	3" / 76.2	7,800 lbf / 34.7 kN	1/4" / 6.35 mm	Bike	3/16" / 4.76	12.8 lbs / 5.8 kg	25.4" / 64.50
JCR950A3-8B	3" / 76.2	7,800 lbf / 34.7 kN	1/4" / 6.35 mm	Bike	1/4" / 6.35	12.8 lbs / 5.8 kg	25.4" / 64.50
JCR950A5-6B	5" / 127	6,400 lbf / 28.5 kN	1/4" / 6.35 mm	Bike	3/16" / 4.76	14.0 lbs / 6.4 kg	27.4" / 69.60
JCR950A5-8B	5" / 127	6,400 lbf / 28.5 kN	1/4" / 6.35 mm	Bike	1/4" / 6.35	14.0 lbs / 6.4 kg	27.4" / 69.60
JCR950A7-6B	7" / 177.8	5,000 lbf / 22.2 kN	3/16" / 4.76mm	Bike	3/16" / 4.76	16.2 lbs / 7.3 kg	29.4" / 74.70
JCR950A7-8B	7" / 177.8	5,000 lbf / 22.2 kN	3/16" / 4.76mm	Bike	1/4" / 6.35	16.2 lbs / 7.3 kg	29.4" / 74.70
JCR1200A3-6A	3" / 76.2	10,500 lbf / 46.70 kN	5/16" / 7.93 mm	Over cylinder	3/16" / 4.76	10 lbs / 4.54 kg	23.8" / 60.5
JCR1200A3-6B	3" / 76.2	10,500 lbf / 46.70 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	11 lbs / 5.00 kg	28.0" / 71.1
JCR1200A3-8A	3" / 76.2	10,500 lbf / 46.70 kN	5/16" / 7.94 mm	Over cylinder	1/4" / 6.35	10 lbs / 4.54 kg	23.8" / 60.5
JCR1200A3-8B	3" / 76.2	10,500 lbf / 46.70 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	11 lbs / 5.00 kg	28.0" / 71.1
JCR1200A5-6A	5" / 127	7,400 lbf / 32.90 kN	1/4" / 6.35 mm	Over cylinder	3/16" / 4.76	11 lbs / 5.00 kg	25.8" / 65.5
JCR1200A5-6B	5" / 127	7,400 lbf / 32.90 kN	1/4" / 6.35 mm	Bike	3/16" / 4.76	12 lbs / 5.44 kg	30.0" / 76.2
JCR1200A5-8A	5" / 127	7,400 lbf / 32.90 kN	1/4" / 6.35 mm	Over cylinder	1/4" / 6.35	11 lbs / 5.00 kg	25.8" / 65.5
JCR1200A5-8B	5" / 127	7,400 lbf / 32.90 kN	1/4" / 6.35 mm	Bike	1/4" / 6.35	12 lbs / 5.44 kg	30.0" / 76.2
JCR1200A7-6A	7" / 177.8	5,600 lbf / 24.90 kN	3/16" / 4.76 mm	Over cylinder	3/16" / 4.76	12.4 lbs / 5.63 kg	27.8" / 70.60
JCR1200A7-6B	7" / 177.8	5,600 lbf / 24.90 kN	3/16" / 4.76 mm	Bike	3/16" / 4.76	13.4 lbs / 6.08 kg	32.0" / 81.3
JCR1200A7-8A	7" / 177.8	5,600 lbf / 24.90 kN	3/16" / 4.76 mm	Over cylinder	1/4" / 6.35	12.4 lbs / 5.63 kg	27.8" / 70.60
JCR1200A7-8B	7" / 177.8	5,600 lbf / 24.90 kN	3/16" / 4.76 mm	Bike	1/4" / 6.35	13.4 lbs / 6.08 kg	32.0" / 81.3
JCR1400A3-6B	3" / 76.2	11,400 lbf / 50.70 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	15.4 lbs / 7.0 kg	29.5" / 74.93
JCR1400A3-8B	3" / 76.2	11,400 lbf / 50.70 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	15.4 lbs / 7.0 kg	29.5" / 74.94
JCR1400A5-6B	5" / 127	9,400 lbf / 41.80 kN	1/4" / 6.35 mm	Bike	3/16" / 4.76	17.2 lbs / 7.8 kg	31.5" / 80.01
JCR1400A5-8B	5" / 127	9,400 lbf / 41.80 kN	1/4" / 6.35 mm	Bike	1/4" / 6.35	17.2 lbs / 7.8 kg	31.5" / 80.01
JCR1400A7-6B	7" / 177.8	7,400 lbf / 32.90 kN	1/4" / 6.35 mm	Bike	3/16" / 4.76	19.6 lbs / 8.9 kg	33.5" / 85.09
JCR1400A7-8B	7" / 177.8	7,400 lbf / 32.90 kN	1/4" / 6.35 mm	Bike	1/4" / 6.35	19.6 lbs / 8.9 kg	33.5" / 85.09
JCR1400A9-6B	9" / 228.6	6,500 lbf / 28.9 kN	1/4" / 6.35 mm	Bike	3/16" / 4.76	24.2 lbs / 11.0 kg	37" / 93.98
JCR1400A9-8B	9" / 228.6	6,500 lbf / 28.9 kN	1/4" / 6.35 mm	Bike	1/4" / 6.35	24.2 lbs / 11.0 kg	37" / 93.98

Specifications subject to change without notice



JCR SERIES Compression Riveters

STANDARD C-YOKE COMPRESSION RIVETERS

PART #	C-YOKE REACH (INCHES/MM)	C-YOKE GAP (INCHES/MM)	COMPRESSIVE FORCE @ 90 PSI/6.2 BAR (IN LBF/KN)	RIVET CAPACITY (2117 AD ALUM.)	VALVE STYLE	SET HOLE SIZE (IN/MM)	WEIGHT WITH JAWS (LBS/ KG)	OVERALL LENGTH (INCHES/CM)
JCR750C1.5/1.25-6B	1.5" / 38.1	1.25" / 31.75	11,000 lbf/48.9 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	10.2 lbs/4.6 kg	24.0" / 61.0
JCR750C1.5/1.25-8B	1.5" / 38.1	1.25" / 31.75	11,000 lbf/48.9 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	10.2 lbs/4.6 kg	24.0" / 61.0
JCR750C1.5/2-6B	1.5" / 38.1	2" / 50.8	11,000 lbf/48.9 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	11.6 lbs/5.3 kg	24.6" / 62.5
JCR750C1.5/2-8B	1.5" / 38.1	2" / 50.8	11,000 lbf/48.9 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	11.6 lbs/5.3 kg	24.6" / 62.5
JCR750C2/1.5-6B	2" / 50.8	1.5" / 38.1	11,000 lbf/48.9 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	11.4 lbs/5.2 kg	24.4" / 62.0
JCR750C2/1.5-8B	2" / 50.8	1.5" / 38.1	11,000 lbf/48.9 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	11.4 lbs/5.2 kg	24.4" / 62.0
JCR750C2.5/1.75-6B	2.5" / 63.5	1.75" / 44.45	11,000 lbf/48.9 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	12.5 lbs/5.7 kg	24.6" / 62.5
JCR750C2.5/1.75-8B	2.5" / 63.5	1.75" / 44.45	11,000 lbf/48.9 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	12.5 lbs/5.7 kg	24.6" / 62.5
JCR750C3/1.5-6B	3" / 76.2	1.5" / 38.1	11,000 lbf/48.9 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	12.7 lbs/5.8 kg	24.8" / 63.0
JCR750C3/1.5-8B	3" / 76.2	1.5" / 38.1	11,000 lbf/48.9 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	12.7 lbs/5.8 kg	24.8" / 63.0
JCR750C3/2-6B	3" / 76.2	2" / 50.8	11,000 lbf/48.9 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	13.2 lbs/6.0 kg	25.2" / 64.0
JCR750C3/2-8B	3" / 76.2	2" / 50.8	11,000 lbf/48.9 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	13.2 lbs/6.0 kg	25.2" / 64.0
JCR750C5/2-6B	5" / 127	2" / 50.8	11,000 lbf/48.9 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	15.2 lbs/6.9 kg	26.9" / 68.3
JCR750C5/2-8B	5" / 127	2" / 50.8	11,000 lbf/48.9 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	15.2 lbs/6.9 kg	26.9" / 68.3
JCR1200C1.5/1.25-6B	1.5" / 38.1	1.25" / 31.75	14,000 lbf/62.3 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	12.8 lbs/5.8 kg	27.9" / 70.9
JCR1200C1.5/1.25-8B	1.5" / 38.1	1.25" / 31.75	14,000 lbf/62.3 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	12.8 lbs/5.8 kg	27.9" / 70.9
JCR1200C1.5/2-6B	1.5" / 38.1	2" / 50.8	14,000 lbf/62.3 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	14.2 lbs/6.4 kg	28.5" / 72.4
JCR1200C1.5/2-8B	1.5" / 38.1	2" / 50.8	14,000 lbf/62.3 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	14.2 lbs/6.4 kg	28.5" / 72.4
JCR1200C2/1.5-6B	2" / 50.8	1.5" / 38.1	14,000 lbf/62.3 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	14.2 lbs/6.4 kg	28.3" / 71.9
JCR1200C2/1.5-8B	2" / 50.8	1.5" / 38.1	14,000 lbf/62.3 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	14.2 lbs/6.4 kg	28.3" / 71.9
JCR1200C2.5/1.75-6B	2.5" / 63.5	1.75" / 44.45	14,000 lbf/62.3 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	15.6 lbs/7.1 kg	28.5" / 72.4
JCR1200C2.5/1.75-8B	2.5" / 63.5	1.75" / 44.45	14,000 lbf/62.3 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	15.6 lbs/7.1 kg	28.5" / 72.4
JCR1200C3/1.5-6B	3" / 76.2	1.5" / 38.1	14,000 lbf/62.3 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	15.8 lbs/7.2 kg	28.7" / 72.9
JCR1200C3/1.5-8B	3" / 76.2	1.5" / 38.1	14,000 lbf/62.3 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	15.8 lbs/7.2 kg	28.7" / 72.9
JCR1200C5/1.5-6B	5" / 127	1.5" / 38.1	14,000 lbf/62.3 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	19 lbs/8.6 kg	28.7" / 72.9
JCR1200C5/1.5-8B	5" / 127	1.5" / 38.1	14,000 lbf/62.3 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	19 lbs/8.6 kg	28.7" / 72.9
JCR1200C6/2-6B	6" / 152.4	2" / 50.8	14,000 lbf/62.3 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	20.2 lbs/9.2 kg	31.2" / 79.3
JCR1200C6/2-8B	6" / 152.4	2" / 50.8	14,000 lbf/62.3 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	20.2 lbs/9.2 kg	31.2" / 79.3

Specifications subject to change without notice



JCR SERIES Compression Riveters

STANDARD C-YOKE COMPRESSION RIVETERS

PART #	C-YOKE REACH (INCHES/MM)	C-YOKE GAP (INCHES/MM)	COMPRESSIVE FORCE @ 90 PSI/6.2 BAR (IN LBF/KN)	RIVET CAPACITY (2117 AD ALUM.)	VALVE STYLE	SET HOLE SIZE (INCHES/MM)	WEIGHT WITH JAWS (LBS/KG)	OVERALL LENGTH (INCHES/CM)
JCR950C1.5/1.25-6B	1.5" / 38.1	1.25" / 31.95	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	13.5 lbs/6.1 kg	25.6" / 65
JCR950C1.5/1.25-8B	1.5" / 38.1	1.25" / 31.95	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	13.5 lbs/6.1 kg	25.6" / 65
JCR950C1.5/2-6B	1.5" / 38.1	2" / 50.8	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	14.5 lbs/6.6 kg	26.4" / 67.1
JCR950C1.5/2-8B	1.5" / 38.1	2" / 50.8	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	14.5 lbs/6.6 kg	26.4" / 67.1
*JCR950C1.6/1.6-6B	1.6" / 40.6	1.6" / 40.6	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	13.5 lbs/6.1 kg	24.9" / 63.3
*JCR950C1.6/1.6-8B	1.6" / 40.6	1.6" / 40.6	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	13.5 lbs/6.1 kg	24.9" / 63.3
JCR950C2/1.5-6B	2" / 50.8	1.5" / 38.1	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	13.5 lbs/6.1 kg	26.0" / 66.0
JCR950C2/1.5-8B	2" / 50.8	1.5" / 38.1	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	13.5 lbs/6.1 kg	26.0" / 66.0
JCR950C2.5/1.38-6B	2.5" / 63.5	1.38" / 35	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	14.5 lbs/6.6 kg	26.0" / 66.0
JCR950C2.5/1.38-8B	2.5" / 63.5	1.38" / 35	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	14.5 lbs/6.6 kg	26.0" / 66.0
JCR950C2.5/1.75-6B	2.5" / 63.5	1.75" / 44.45	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	16.5 lbs/7.5 kg	26.5" / 67.3
JCR950C2.5/1.75-8B	2.5" / 63.5	1.75" / 44.45	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	16.5 lbs/7.5 kg	26.5" / 67.3
JCR950C3/1.5-6B	3" / 76.2	1.5" / 38.1	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	15 lbs/6.8 kg	26.8" / 68.1
JCR950C3/1.5-8B	3" / 76.2	1.5" / 38.1	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	15 lbs/6.8 kg	26.8" / 68.1
JCR950C3/2-6B	3" / 76.2	2" / 50.8	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	15.5 lbs/7.0 kg	27.3" / 69.3
JCR950C3/2-8B	3" / 76.2	2" / 50.8	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	15.5 lbs/7.0 kg	27.3" / 69.3
JCR950C5/2-6B	5" / 127	2" / 50.8	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	3/16" / 4.76	18 lbs/8.2 kg	30.1" / 76.5
JCR950C5/2-8B	5" / 127	2" / 50.8	12,000 lbf/53.4 kN	5/16" / 7.94 mm	Bike	1/4" / 6.35	18 lbs/8.2 kg	30.1" / 76.5

*Stringer Application C-Yoke

JCR1400C2.38/1.25-6B	2.38" / 60.45	1.25" / 31.75	18,000 lbf/80 kN	3/8" / 9.53 mm	Bike	3/16" / 4.76	19.5 lbs/8.8 kg	31.0" / 78.7
JCR1400C2.38/1.25-8B	2.38" / 60.45	1.25" / 31.75	18,000 lbf/80 kN	3/8" / 9.53 mm	Bike	1/4" / 6.35	19.5 lbs/8.8 kg	31.0" / 78.7
JCR1400C2.5/1.75-6B	2.5" / 63.5	1.75" / 44.5	18,000 lbf/80 kN	3/8" / 9.53 mm	Bike	3/16" / 4.76	21.0 lbs/9.5 kg	31.1" / 79.0
JCR1400C2.5/1.75-8B	2.5" / 63.5	1.75" / 44.5	18,000 lbf/80 kN	3/8" / 9.53 mm	Bike	1/4" / 6.35	21.0 lbs/9.5 kg	31.1" / 79.0
JCR1400C3/1.5-6B	3" / 76.2	1.5" / 38.1	18,000 lbf/80 kN	3/8" / 9.53 mm	Bike	3/16" / 4.76	20.5 lbs/9.3 kg	31.1" / 79.0
JCR1400C3/1.5-8B	3" / 76.2	1.5" / 38.1	18,000 lbf/80 kN	3/8" / 9.53 mm	Bike	1/4" / 6.35	20.5 lbs/9.3 kg	31.1" / 79.0
JCR1400C3.38/3-6B	3.38" / 85.9	3" / 76.2	18,000 lbf/80 kN	3/8" / 9.53 mm	Bike	3/16" / 4.76	21.0 lbs/9.5 kg	33.2" / 84.3
JCR1400C3.38/3-8B	3.38" / 85.9	3" / 76.2	18,000 lbf/80 kN	3/8" / 9.53 mm	Bike	1/4" / 6.35	21.0 lbs/9.5 kg	33.2" / 84.3
JCR 1400C3.75/1.25-6B	3.75" / 95.3	1.25" / 31.95	18,000 lbf/80 kN	3/8" / 9.53 mm	Bike	3/16" / 4.76	21.5 lbs/9.8 kg	32.2" / 81.8
JCR 1400C3.75/1.25-8B	3.75" / 95.3	1.25" / 31.95	18,000 lbf/80 kN	3/8" / 9.53 mm	Bike	1/4" / 6.35	21.5 lbs/9.8 kg	32.2" / 81.8
JCR1400C4/3-6B	4" / 101.6	3" / 76.2	18,000 lbf/80 kN	3/8" / 9.53 mm	Bike	3/16" / 4.76	21.5 lbs/9.8 kg	34.2" / 86.9
JCR1400C4/3-8B	4" / 101.6	3" / 76.2	18,000 lbf/80 kN	3/8" / 9.53 mm	Bike	1/4" / 6.35	21.5 lbs/9.8 kg	34.2" / 86.9
JCR1400C4.5/4.5-6B	4.5" / 114.3	4.5" / 114.3	18,000 lbf/80 kN	3/8" / 9.53 mm	Bike	3/16" / 4.76	23.0 lbs/10.4 kg	34.7" / 88.1
JCR1400C4.5/4.5-8B	4.5" / 114.3	4.5" / 114.3	18,000 lbf/80 kN	3/8" / 9.53 mm	Bike	1/4" / 6.35	23.0 lbs/10.4 kg	34.7" / 88.1

Specifications subject to change without notice



JCR SERIES Compression Riveters

With our modular and ergonomic design and extreme-service specialty bearings, these compression riveters are available in a variety of standard jaw reaches & C-yoke styles. Special C-yokes and alligator jaw designs available on request.

COMPETITIVE COMPARISON VS OTHER COMPRESSION RIVETERS:

MODEL	JAW REACH	COMPRESSIVE FORCE @ 90 PSI/6.2 BAR	WEIGHT	POWER/WEIGHT RATIO IMPERIAL	POWER/WEIGHT RATIO METRIC
JCR750A3-6B	3" / 76.2 mm	6200 lbf / 27.58 kN	10 lbs / 4.53 kg	620 lbf/lb	6.1 kN/kg
JCR1200A3-6B	3" / 76.2 mm	10,500 lbf / 46.71 kN	11 lbs / 5.00 kg	956 lbf/lb	9.34 kN/kg
JCR1400A3-6B	3" / 76.2 mm	13,000 lbf / 57.83 kN	16.5 lbs / 7.48 kg	788 lbf/lb	7.73 kN/kg
Atlantic 90A-A30	3" / 76.2 mm	5,200 lbf / 23.13 kN	8 lbs / 3.63 kg	650 lbf/lb	6.37 kN/kg
Atlantic 444ASH-A32	3.25" / 82.55 mm	9,800 lbf / 43.59 kN	15.5 lbs / 7.03 kg	632 lbf/lb	6.2 kN/kg
Chicago Pneumatic CP0351ESGEL	2.875" / 73.025 mm	10,400 lbf / 46.26 kN	15.75 lbs / 7.14 kg	660 lbf/lb	6.48 kN/kg
JCR750A5-6B	5" / 127 mm	5,300 lbf / 23.57 kN	10.5 lbs / 4.76 kg	505 lbf/lb	4.95 kN/kg
JCR1200A5-6B	5" / 127 mm	7,400 lbf / 32.92 kN	12 lbs / 5.44 kg	617 lbf/lb	6.1 kN/kg
JCR1400A5-6B	5" / 127 mm	9,400 lbf / 41.81 kN	17.2 lbs / 7.8 kg	547 lbf/lb	5.36 kN/kg
Atlantic 444ASH-A52	5" / 127 mm	6,800 lbf / 30.25 kN	17 lbs / 7.71 kg	400 lbf/lb	3.92 kN/kg
Chicago Pneumatic CP0351ESKEL	5" / 127 mm	6,800 lbf / 30.25 kN	22.5 lbs / 10.2 kg	302 lbf/lb	2.97 kN/kg
JCR1200A7-6B	7" / 177.8 mm	6,200 lbf / 27.58 kN	13.4 lbs / 6.08 kg	463 lbf/lb	4.54 kN/kg
JCR1400A7-6B	7" / 177.8 mm	8,500 lbf / 37.81 kN	19.6 lbs / 8.9 kg	433 lbf/lb	4.25 kN/kg
Atlantic 444ASH-A72	7" / 177.8 mm	6,000 lbf / 26.69 kN	18.5 lbs / 8.39 kg	324 lbf/lb	3.18 kN/kg
Chicago Pneumatic CP0351ESREL	7" / 177.8 mm	6,000 lbf / 26.69 kN	27 lbs / 12.25 kg	222 lbf/lb	2.18 kN/kg
JCR1400A9-6B	9.125" / 231.77 mm	6,500 lbf / 28.91 kN	24.2 lbs / 11.0 kg	269 lbf/lb	2.63 kN/kg
Atlantic 444ASH-A92	9.125" / 231.77 mm	6,000 lbf / 26.69 kN	23 lbs / 10.43 kg	261 lbf/lb	2.59 kN/kg
Chicago Pneumatic CP0351ESVEL	9.125" / 231.77 mm	6,000 lbf / 26.69 kN	29 lbs / 13.15 kg	207 lbf/lb	2.03 kN/kg

	2-Cylinder; Small Diameter
	3-Cylinder; Small Diameter
	3-Cylinder; Large Diameter



1-800-828-8665 ♦ jiffyairtool.com
2254 Conestoga Dr. Carson City, NV. 89706