CONTINENTAL TOOL GROUP

JCR Series Compression Riveters Alligator & C-Yoke Type



Your Solutions Provider!

Jiffy AIR TOOL

US & Canada: 800-327-9403 | continentaltoolgroup.com

JCR SERIES Compression Riveters

Designed by a former aircraft manufacturing engineer, these rugged and reliable pneumatic rivet squeezers are the most powerful and lightweight in the industry.

Jiffy Air Tool JCR Series Compression Riveters are rugged, lightweight pneumatic rivet squeezers engineered for demanding assembly applications. Available with a variety of standard jaw reaches and C-Yoke styles, the modular design allows compatible rivet head assemblies to be quickly changed for longer or shorter reaches.

Extreme-duty sealed bearings, an ergonomic “B” valve handle and feather-touch stroke control provide reliable performance, operator comfort and precise rivet setting. The patented design has been tested under load for more than 250,000 cycles.

- Available in a variety of standard jaw reaches and C-Yoke styles
- Rugged, reliable pneumatic rivet squeezers with a powerful, lightweight design
- Extreme-duty sealed bearings in the alligator jaw and C-Yoke rivet head assemblies
- Lighter than comparable large tandem- and triple-cylinder compression riveters
- Modular cylinder and wedge design allows quick changes between compatible rivet head assemblies
- Ergonomic body with a lightweight, comfortable “B” valve handle
- Patented design tested under load for more than 250,000 cycles
- Feather-touch control provides precise alligator jaw and C-Yoke set-holder stroke



ALLIGATOR JAW SET

- Extreme-duty bearings in the Alligator & C-Yoke rivet head assemblies
- Lighter than comparable large tandem & triple cylinder compression riveters
- Modular design across compatible cylinder diameters and wedge allow quick change of rivet head assemblies to longer or shorter jaw/yoke reaches





BIKE HANDLE THROTTLE

- Ergonomic body with lightweight & comfortable “B” valve handle design
- Patented design tested under load for > 250,000 cycles
- Feather-touch control on Alligator Jaw/C-Yoke set holder stroke - not uncontrollably rapid like other compression riveters

Standard Alligator Compression Riveters

Model #	Jaw Reach inches (mm)	Compressive Force @ 90 psi (6.2 bar) lbf (kN)	Rivet Capacity (2117 Ad ALUM.) inches (mm)	Valve Style	Set Hole Size inches (mm)	Weight w/Jaws lbs (kg)	Overall Length inches (cm)
JCR750A3-6A	3.00 (76.20)	7,200 (32.00)	1/4 (6.35)	Over Cylinder	3/16 (4.76)	9.00 (4.08)	19.80 (50.30)
JCR750A3-6B	3.00 (76.20)	7,200 (32.00)	1/4 (6.35)	Bike	3/16 (4.76)	10.00 (4.54)	24.00 (61.00)
JCR750A3-8A	3.00 (76.20)	7,200 (32.00)	1/4 (6.35)	Over Cylinder	1/4 (6.35)	9.00 (4.08)	19.80 (50.30)
JCR750A3-8B	3.00 (76.20)	7,200 (32.00)	1/4 (6.35)	Bike	1/4 (6.35)	10.00 (4.54)	24.00 (61.00)
JCR750A5-6A	5.00 (127.00)	6,000 (26.69)	3/16 (4.76)	Over Cylinder	3/16 (4.76)	10.00 (4.54)	21.80 (55.40)
JCR750A5-6B	5.00 (127.00)	6,000 (26.69)	3/16 (4.76)	Bike	3/16 (4.76)	10.80 (4.90)	26.00 (66.00)
JCR750A5-8A	5.00 (127.00)	6,000 (26.69)	3/16 (4.76)	Over Cylinder	1/4 (6.35)	10.00 (4.54)	21.80 (55.40)
JCR750A5-8B	5.00 (127.00)	6,000 (26.69)	3/16 (4.76)	Bike	1/4 (6.35)	10.80 (4.90)	26.00 (66.00)
JCR950A3-6B	3.00 (76.20)	7,800 (34.70)	1/4 (6.35)	Bike	3/16 (4.76)	14.20 (6.44)	25.40 (64.50)
JCR950A3-8B	3.00 (76.20)	7,800 (34.70)	1/4 (6.35)	Bike	1/4 (6.35)	14.20 (6.44)	25.40 (64.50)
JCR950A5-6B	5.00 (127.00)	6,600 (29.36)	1/4 (6.35)	Bike	3/16 (4.76)	15.10 (6.85)	27.40 (69.60)
JCR950A5-8B	5.00 (127.00)	6,600 (29.36)	1/4 (6.35)	Bike	1/4 (6.35)	15.10 (6.85)	27.40 (69.60)
JCR950A7-6B	7.00 (177.80)	5,600 (24.90)	3/16 (4.76)	Bike	3/16 (4.76)	16.80 (7.62)	29.40 (74.70)
JCR950A7-8B	7.00 (177.80)	5,600 (24.90)	3/16 (4.76)	Bike	1/4 (6.35)	16.80 (7.62)	29.40 (74.70)
JCR1200A3-6A	3.00 (76.20)	10,500 (46.70)	5/16 (7.94)	Over Cylinder	3/16 (4.76)	10.40 (4.72)	23.80 (60.50)
JCR1200A3-6B	3.00 (76.20)	10,500 (46.70)	5/16 (7.94)	Bike	3/16 (4.76)	11.20 (5.08)	28.00 (71.10)
JCR1200A3-8A	3.00 (76.20)	10,500 (46.70)	5/16 (7.94)	Over Cylinder	1/4 (6.35)	10.40 (4.72)	23.80 (60.50)
JCR1200A3-8B	3.00 (76.20)	10,500 (46.70)	5/16 (7.94)	Bike	1/4 (6.35)	11.20 (5.08)	28.00 (71.10)
JCR1200A5-6A	5.00 (127.00)	7,400 (32.90)	1/4 (6.35)	Over Cylinder	3/16 (4.76)	11.30 (5.13)	25.80 (65.50)
JCR1200A5-6B	5.00 (127.00)	7,400 (32.90)	1/4 (6.35)	Bike	3/16 (4.76)	12.00 (5.44)	30.00 (76.20)
JCR1200A5-8A	5.00 (127.00)	7,400 (32.90)	1/4 (6.35)	Over Cylinder	1/4 (6.35)	11.30 (5.13)	25.80 (65.50)
JCR1200A5-8B	5.00 (127.00)	7,400 (32.90)	1/4 (6.35)	Bike	1/4 (6.35)	12.00 (5.44)	30.0 (76.20)
JCR1200A7-6A	7.00 (177.80)	6,200 (27.58)	3/16 (4.76)	Over Cylinder	3/16 (4.76)	12.30 (5.58)	27.80 (70.60)
JCR1200A7-6B	7.00 (177.80)	6,200 (27.58)	3/16 (4.76)	Bike	3/16 (4.76)	13.10 (5.94)	32.00 (81.30)
JCR1200A7-8A	7.00 (177.80)	6,200 (27.58)	3/16 (4.76)	Over Cylinder	1/4 (6.35)	12.30 (5.58)	27.80 (70.60)
JCR1200A7-8B	7.00 (177.80)	6,200 (27.58)	3/16 (4.76)	Bike	1/4 (6.35)	13.10 (5.94)	32.00 (81.30)
JCR1400A3-6B	3.00 (76.20)	11,400 (50.70)	5/16 (7.94)	Bike	3/16 (4.76)	16.30 (7.39)	29.70 (75.44)
JCR1400A3-8B	3.00 (76.20)	11,400 (50.70)	5/16 (7.94)	Bike	1/4 (6.35)	16.30 (7.39)	29.70 (75.44)
JCR1400A5-6B	5.00 (127.00)	9,400 (41.80)	1/4 (6.35)	Bike	3/16 (4.76)	17.40 (7.89)	31.70 (80.52)
JCR1400A5-8B	5.00 (127.00)	9,400 (41.80)	1/4 (6.35)	Bike	1/4 (6.35)	17.40 (7.89)	31.70 (80.52)
JCR1400A7-6B	7.00 (177.80)	7,400 (32.90)	1/4 (6.35)	Bike	3/16 (4.76)	20.10 (9.12)	33.70 (85.60)
JCR1400A7-8B	7.00 (177.80)	7,400 (32.90)	1/4 (6.35)	Bike	1/4 (6.35)	20.10 (9.12)	33.70 (85.60)
JCR1400A9-6B	9.00 (228.60)	6,500 (28.90)	1/4 (6.35)	Bike	3/16 (4.76)	23.90 (10.84)	36.90 (93.73)
JCR1400A9-8B	9.00 (228.60)	6,500 (28.90)	1/4 (6.35)	Bike	1/4 (6.35)	23.90 (10.84)	36.90 (93.73)

Specifications subject to change without notice

Jiffy AIR TOOL®


Your Solutions Provider!

US & Canada: 800-327-9403 | continentaltoolgroup.com

Standard C-Yoke Type Compression Riveters

Model #	C-Yoke Reach inches (mm)	C-Yoke Gap inches (mm)	Compressive Force @ 90 psi (6.2 bar) lbf (kN)	Rivet Capacity (2117 Ad ALUM.) inches (mm)	Valve Style	Set Hole Size inches (mm)	Weight w/Jaws lbs (kg)	Overall Length inches (cm)
JCR750C1.5/1.25-6B	1.50 (38.10)	1.25 (31.75)	11,000 (48.90)	5/16 (7.94)	Bike	3/16 (4.76)	10.20 (4.60)	24.20 (61.47)
JCR750C1.5/1.25-8B	1.50 (38.10)	1.25 (31.75)	11,000 (48.90)	5/16 (7.94)	Bike	1/4 (6.35)	10.20 (4.60)	24.20 (61.47)
JCR750C1.5/2-6B	1.50 (38.10)	2.00 (50.80)	11,000 (48.90)	5/16 (7.94)	Bike	3/16 (4.76)	11.50 (5.22)	24.60 (62.50)
JCR750C1.5/2-8B	1.50 (38.10)	2.00 (50.80)	11,000 (48.90)	5/16 (7.94)	Bike	1/4 (6.35)	11.50 (5.22)	24.60 (62.50)
JCR750C2/1.5-6B	2.00 (50.80)	1.50 (38.10)	11,000 (48.90)	5/16 (7.94)	Bike	3/16 (4.76)	12.30 (5.58)	24.90 (63.25)
JCR750C2/1.5-8B	2.00 (50.80)	1.50 (38.10)	11,000 (48.90)	5/16 (7.94)	Bike	1/4 (6.35)	12.30 (5.58)	24.90 (63.25)
JCR750C2.5/1.75-6B	2.50 (63.50)	1.75 (44.45)	11,000 (48.90)	5/16 (7.94)	Bike	3/16 (4.76)	12.50 (5.70)	24.90 (63.25)
JCR750C2.5/1.75-8B	2.50 (63.50)	1.75 (44.45)	11,000 (48.90)	5/16 (7.94)	Bike	1/4 (6.35)	12.50 (5.70)	24.90 (63.25)
JCR750C3/1.5-6B	3.00 (76.20)	1.50 (38.10)	11,000 (48.90)	5/16 (7.94)	Bike	3/16 (4.76)	12.40 (5.63)	24.80 (63.00)
JCR750C3/1.5-8B	3.00 (76.20)	1.50 (38.10)	11,000 (48.90)	5/16 (7.94)	Bike	1/4 (6.35)	12.40 (5.63)	24.80 (63.00)
JCR750C3/2-6B	3.00 (76.20)	2.00 (50.80)	11,000 (48.90)	5/16 (7.94)	Bike	3/16 (4.76)	12.70 (5.00)	25.20 (64.00)
JCR750C3/2-8B	3.00 (76.20)	2.00 (50.80)	11,000 (48.90)	5/16 (7.94)	Bike	1/4 (6.35)	12.70 (5.00)	25.20 (64.00)
JCR750C5/2-6B	5.00 (127.00)	2.00 (50.80)	11,000 (48.90)	5/16 (7.94)	Bike	3/16 (4.76)	19.00 (8.62)	26.90 (68.30)
JCR750C5/2-8B	5.00 (127.00)	2.00 (50.80)	11,000 (48.90)	5/16 (7.94)	Bike	1/4 (6.35)	19.00 (8.62)	26.90 (68.30)
JCR1200C1.5/1.25-6B	1.50 (38.10)	1.25 (31.75)	14,000 (62.30)	5/16 (7.94)	Bike	3/16 (4.76)	12.20 (5.53)	28.10 (71.37)
JCR1200C1.5/1.25-8B	1.50 (38.10)	1.25 (31.75)	14,000 (62.30)	5/16 (7.94)	Bike	1/4 (6.35)	12.20 (5.53)	28.10 (71.37)
JCR1200C1.5/2-6B	1.50 (38.10)	2.00 (50.80)	14,000 (62.30)	5/16 (7.94)	Bike	3/16 (4.76)	12.60 (5.72)	28.50 (72.40)
JCR1200C1.5/2-8B	1.50 (38.10)	2.00 (50.80)	14,000 (62.30)	5/16 (7.94)	Bike	1/4 (6.35)	12.60 (5.72)	28.50 (72.40)
JCR1200C2/1.5-6B	2.00 (50.80)	1.50 (38.10)	14,000 (62.30)	5/16 (7.94)	Bike	3/16 (4.76)	13.20 (5.99)	28.80 (73.15)
JCR1200C2/1.5-8B	2.00 (50.80)	1.50 (38.10)	14,000 (62.30)	5/16 (7.94)	Bike	1/4 (6.35)	13.20 (5.99)	28.80 (73.15)
JCR1200C2.5/1.75-6B	2.50 (63.50)	1.75 (44.45)	14,000 (62.30)	5/16 (7.94)	Bike	3/16 (4.76)	13.40 (6.08)	28.80 (73.15)
JCR1200C2.5/1.75-8B	2.50 (63.50)	1.75 (44.45)	14,000 (62.30)	5/16 (7.94)	Bike	1/4 (6.35)	13.40 (6.08)	28.80 (73.15)
JCR1200C3/1.5-6B	3.00 (76.20)	1.50 (38.10)	14,000 (62.30)	5/16 (7.94)	Bike	3/16 (4.76)	13.40 (6.08)	28.70 (72.90)
JCR1200C3/1.5-8B	3.00 (76.20)	1.50 (38.10)	14,000 (62.30)	5/16 (7.94)	Bike	1/4 (6.35)	13.40 (6.08)	28.70 (72.90)
JCR1200C5/1.5-6B	5.00 (127.00)	1.50 (38.10)	14,000 (62.30)	5/16 (7.94)	Bike	3/16 (4.76)	19.60 (8.89)	30.50 (77.47)
JCR1200C5/1.5-8B	5.00 (127.00)	1.50 (38.10)	14,000 (62.30)	5/16 (7.94)	Bike	1/4 (6.35)	19.60 (8.89)	30.50 (77.47)
JCR1200C6/2-6B	6.00 (152.40)	2.00 (50.80)	14,000 (62.30)	5/16 (7.94)	Bike	3/16 (4.76)	20.20 (9.20)	31.20 (79.30)
JCR1200C6/2-8B	6.00 (152.40)	2.00 (50.80)	14,000 (62.30)	5/16 (7.94)	Bike	1/4 (6.35)	20.20 (9.20)	31.20 (79.30)

Specifications subject to change without notice

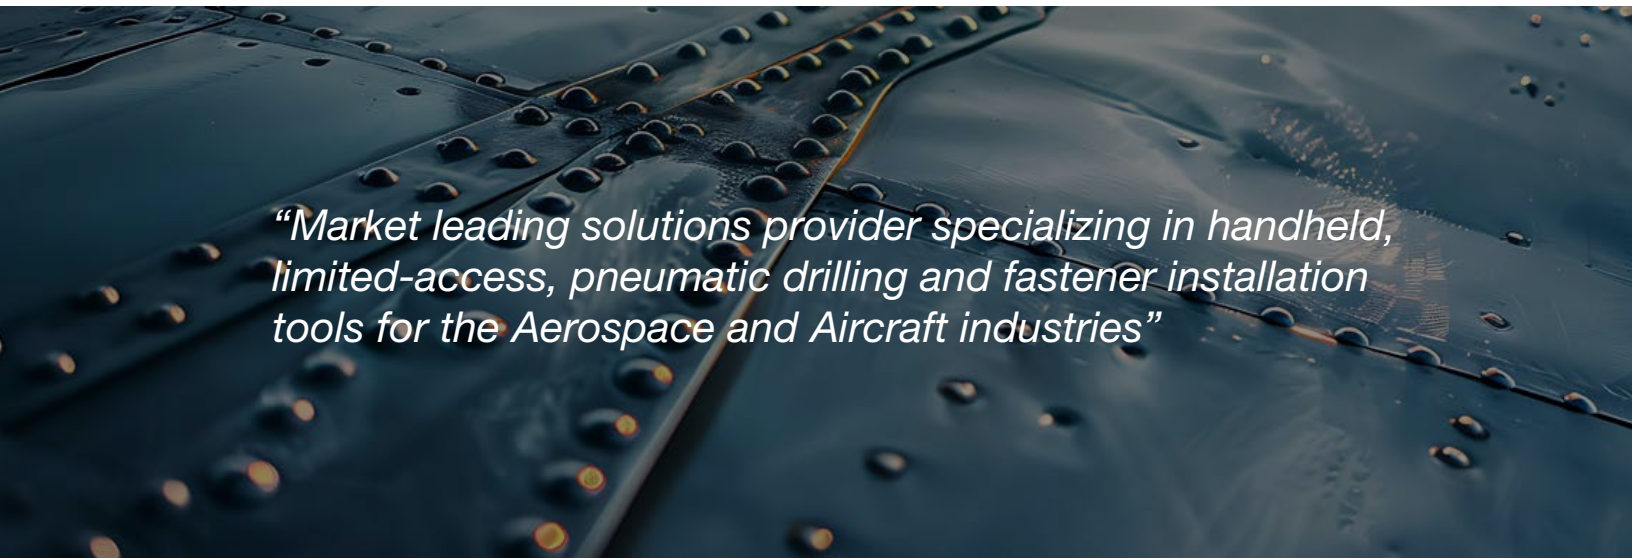

Standard C-Yoke Type Compression Riveters

Model #	C-Yoke Reach inches (mm)	C-Yoke Gap inches (mm)	Compressive Force @ 90 psi (6.2 bar) lbf (kN)	Rivet Capacity (2117 Ad ALUM.) inches (mm)	Valve Style	Set Hole Size inches (mm)	Weight w/Jaws lbs (kg)	Overall Length inches (cm)
JCR950C1.5/1.25-6B	1.50 (38.10)	1.25 (31.95)	12,000 (53.40)	5/16 (7.94)	Bike	3/16 (4.76)	13.50 (6.10)	25.60 (65.00)
JCR950C1.5/1.25-8B	1.50 (38.10)	1.25 (31.95)	12,000 (53.40)	5/16 (7.94)	Bike	1/4 (6.35)	13.50 (6.10)	25.60 (65.00)
JCR950C1.5/2-6B	1.50 (38.10)	2.00 (50.80)	12,000 (53.40)	5/16 (7.94)	Bike	3/16 (4.76)	14.50 (6.60)	26.40 (67.10)
JCR950C1.5/2-8B	1.50 (38.10)	2.00 (50.80)	12,000 (53.40)	5/16 (7.94)	Bike	1/4 (6.35)	14.50 (6.60)	26.40 (67.10)
JCR950C1.5/3-6B	1.50 (38.10)	3.00 (76.20)	12,000 (53.40)	5/16 (7.94)	Bike	3/16 (4.76)	16.80 (7.62)	27.90 (70.89)
JCR950C1.5/3-8B	1.50 (38.10)	3.00 (76.20)	12,000 (53.40)	5/16 (7.94)	Bike	1/4 (6.35)	16.80 (7.62)	27.90 (70.89)
*JCR950C1.6/1.6-6B	1.60 (40.60)	1.60 (40.60)	12,000 (53.40)	5/16 (7.94)	Bike	3/16 (4.76)	13.50 (6.10)	24.90 (63.30)
*JCR950C1.6/1.6-8B	1.60 (40.60)	1.60 (40.60)	12,000 (53.40)	5/16 (7.94)	Bike	1/4 (6.35)	13.50 (6.10)	24.90 (63.30)
JCR950C2/1.5-6B	2.00 (50.80)	1.50 (38.10)	12,000 (53.40)	5/16 (7.94)	Bike	3/16 (4.76)	13.50 (6.10)	26.00 (66.00)
JCR950C2/1.5-8B	2.00 (50.80)	1.50 (38.10)	12,000 (53.40)	5/16 (7.94)	Bike	1/4 (6.35)	13.50 (6.10)	26.00 (66.00)
JCR950C2.25/2.25-6B	2.25 (57.15)	2.25 (57.15)	12,000 (53.40)	5/16 (7.94)	Bike	3/16 (4.76)	17.20 (7.80)	27.60 (70.10)
JCR950C2.25/2.25-8B	2.25 (57.15)	2.25 (57.15)	12,000 (53.40)	5/16 (7.94)	Bike	1/4 (6.35)	17.20 (7.80)	27.60 (70.10)
JCR950C2.5/1.38-6B	2.50 (63.50)	1.38 (35.00)	12,000 (53.40)	5/16 (7.94)	Bike	3/16 (4.76)	15.80 (7.17)	26.40 (67.06)
JCR950C2.5/1.38-8B	2.50 (63.50)	1.38 (35.00)	12,000 (53.40)	5/16 (7.94)	Bike	1/4 (6.35)	15.80 (7.17)	26.40 (67.06)
JCR950C2.5/1.75-6B	2.50 (63.50)	1.75 (44.45)	12,000 (53.40)	5/16 (7.94)	Bike	3/16 (4.76)	16.50 (7.50)	26.40 (67.06))
JCR950C2.5/1.75-8B	2.50 (63.50)	1.75 (44.45)	12,000 (53.40)	5/16 (7.94)	Bike	1/4 (6.35)	16.50 (7.50)	26.50 (67.30)
JCR950C3/1.5-6B	3.00 (76.20)	1.50 (38.10)	12,000 (53.40)	5/16 (7.94)	Bike	3/16 (4.76)	15.00 (6.80)	26.80 (68.10)
JCR950C3/1.5-8B	3.00 (76.20)	1.50 (38.10)	12,000 (53.40)	5/16 (7.94)	Bike	1/4 (6.35)	15.00 (6.80)	26.80 (68.10)
JCR950C3/2-6B	3.00 (76.20)	2.00 (50.80)	12,000 (53.40)	5/16 (7.94)	Bike	3/16 (4.76)	15.50 (7.00)	27.30 (69.30)
JCR950C3/2-8B	3.00 (76.20)	2.00 (50.80)	12,000 (53.40)	5/16 (7.94)	Bike	1/4 (6.35)	15.50 (7.00)	27.30 (69.30)
JCR950C5/2-6B	5.00 (127.00)	2.00 (50.80)	12,000 (53.40)	5/16 (7.94)	Bike	3/16 (4.76)	18.00 (8.20)	30.10 (76.50)
JCR950C5/2-8B	5.00 (127.00)	2.00 (50.80)	12,000 (53.40)	5/16 (7.94)	Bike	1/4 (6.35)	18.00 (8.20)	30.10 (76.50)
JCR1400C2.38/1.25-6B	2.38 (60.45)	1.25 (31.75)	18,000 (80.00)	3/8 (9.53)	Bike	3/16 (4.76)	19.50 (8.80)	31.00 (78.70)
JCR1400C2.38/1.25-8B	2.38 (60.45)	1.25 (31.75)	18,000 (80.00)	3/8 (9.53)	Bike	1/4 (6.35)	19.50 (8.80)	31.00 (78.70)
JCR1400C2.5/1.75-6B	2.50 (63.50)	1.75 (44.50)	18,000 (80.00)	3/8 (9.53)	Bike	3/16 (4.76)	21.00 (9.50)	31.10 (79.00)
JCR1400C2.5/1.75-8B	2.50 (63.50)	1.75 (44.50)	18,000 (80.00)	3/8 (9.53)	Bike	1/4 (6.35)	21.00 (9.50)	31.10 (79.00)
JCR1400C3/1.5-6B	3.00 (76.20)	1.50 (38.10)	18,000 (80.00)	3/8 (9.53)	Bike	3/16 (4.76)	19.00 (8.62)	31.10 (79.00)
JCR1400C3/1.5-8B	3.00 (76.20)	1.50 (38.10)	18,000 (80.00)	3/8 (9.53)	Bike	1/4 (6.35)	19.00 (8.62)	31.10 (79.00)
JCR1400C3.38/3-6B	3.38 (85.90)	3.00 (76.20)	18,000 (80.00)	3/8 (9.53)	Bike	3/16 (4.76)	21.00 (9.50)	33.20 (84.30)
JCR1400C3.38/3-8B	3.38 (85.90)	3.00 (76.20)	18,000 (80.00)	3/8 (9.53)	Bike	1/4 (6.35)	21.00 (9.50)	33.20 (84.30)
JCR 1400C3.75/1.25-6B	3.75 (95.30)	1.25 (31.95)	18,000 (80.00)	3/8 (9.53)	Bike	3/16 (4.76)	21.50 (9.80)	32.20 (81.80)
JCR 1400C3.75/1.25-8B	3.75 (95.30)	1.25 (31.95)	18,000 (80.00)	3/8 (9.53)	Bike	1/4 (6.35)	21.50 (9.80)	32.20 (81.80)
JCR1400C4/3-6B	4.00 (101.60)	3.00 (76.20)	18,000 (80.00)	3/8 (9.53)	Bike	3/16 (4.76)	21.50 (9.80)	34.20 (86.90)
JCR1400C4/3-8B	4.00 (101.60)	3.00 (76.20)	18,000 (80.00)	3/8 (9.53)	Bike	1/4 (6.35)	21.50 (9.80)	34.20 (86.90)
JCR1400C4.5/4.5-6B	4.50 (114.30)	4.50 (114.30)	18,000 (80.00)	3/8 (9.53)	Bike	3/16 (4.76)	23.00 (10.40)	34.70 (88.10)
JCR1400C4.5/4.5-8B	4.50 (114.30)	4.50 (114.30)	18,000 (80.00)	3/8 (9.53)	Bike	1/4 (6.35)	23.00 (10.40)	34.70 (88.10)

Specifications subject to change without notice. | *Stringer Application C-Yoke

Jiffy AIR TOOL®

Your Solutions Provider!

US & Canada: 800-327-9403 | continentaltoolgroup.com

Competitive Comparison vs Other Compression Riveters

With our modular and ergonomic design and extreme-service specialty bearings, these compression riveters are available in a variety of standard jaw reaches and C-Yoke styles. Special C-Yokes and alligator jaw designs available on request.

Model #	Jaw Reach inches (mm)	Compressive Force @ 90 psi (6.2 bar) lbf (kN)	Weight lbs (kg)	Power Weight Ration Imperial lbf/lb	Power Weight Ration Metric kN/kg
JCR750A3-6B	3.0 (76.20)	7,200 (32.00)	10.00 (4.53)	620	6.10
JCR1200A3-6B	3.0 (76.20)	10,500 (46.71)	11.00 (5.00)	956	9.34
JCR1400A3-6B	3.0 (76.20)	13,000 (57.83)	16.50 (7.48)	788	7.73
Atlantic 90A-A30	3.0 (76.20)	5,200 (23.13)	8.00 (3.63)	650	6.37
Atlantic 444ASH-A32	3.25 (82.55)	9,800 (43.59)	15.50 (7.03)	632	6.20
Chicago Pneumatic CP0351ESGEL	2.875 (73.025)	10,400 (46.26)	15.75 (7.14)	660	6.48
JCR750A5-6B	5.0 (127.00)	6,000 (26.69)	10.50 (4.76)	505	4.95
JCR1200A5-6B	5.0 (127.00)	7,400 (32.92)	12.00 (5.44)	617	6.10
JCR1400A5-6B	5.0 (127.00)	9,400 (41.81)	17.20 (7.80)	547	5.36
Atlantic 444ASH-A52	5.0 (127.00)	6,800 (30.25)	17.00 (7.71)	400	3.92
Chicago Pneumatic CP0351ESKEL	5.0 (127.00)	6,800 (30.25)	22.50 (10.20	302	2.97
JCR1200A7-6B	7.0 (177.80)	6,200 (27.58)	13.40 (6.08)	463	4.54
JCR1400A7-6B	7.0 (177.80)	8,500 (37.81)	19.60 (8.9)	433	4.25
Atlantic 444ASH-A72	7.0 (177.80)	6,000 (26.69)	18.50 (8.39)	324	3.18
Chicago Pneumatic CP0351ESREL	7.0 (177.80)	6,000 (26.69)	27.00 (12.25)	222	2.18
JCR1400A9-6B	9.125 (231.77)	6,500 (28.91)	24.20 (11.0)	269	2.63
Atlantic 444ASH-A92	9.125 (231.77)	6,000 (26.69)	23.00 (10.43)	261	2.59
Chicago Pneumatic CP0351ESVEL	9.125 (231.77)	6,000 (26.69)	29.00 (13.15)	207	2.03
2-Cylinder; Small Diameter		3-Cylinder; Small Diameter		3-Cylinder; Large Diameter	





Your Solutions Provider!

Jiffy AIR TOOL

CONTINENTAL TOOL GROUP

continentaltoolgroup.com

US & Canada: 800-327-9403 | continentaltoolgroup.com

Jiffy Air Tool Registered Trademark of Continental Tool Group, Inc.
Copyright © Continental Tool Group, Inc. 2026

Stock # 000137