




Universal Tool

Air Tools for Industry



UT8891HD Aircraft Angle Drill

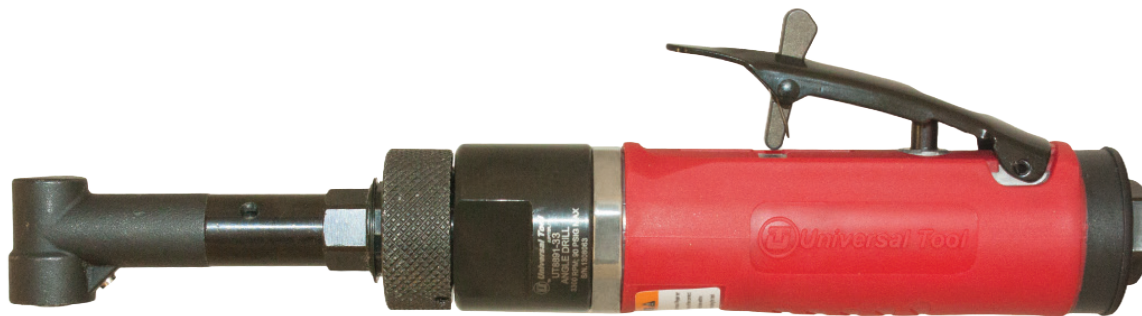

FEATURES & SPECIFICATIONS

- 0.45 HP (0.33 kW) motor ensures no slow down & clean break through
- Machined carbon fiber blades for lubrication free operation
- Highest precision engineering ensures 600,000 cycles of use
- Internal silencer baffle reduces noise pressure to 81 d(B)A
- Precision engineered angle head and gears supported by ball bearings; and 1/4" x 28 TPI internal thread
- Angle head interchangeable with UT8893 series
- Best for: Continuous precision air frame work

Model #	Motor hp (kW)	Gear Ratio	Speed (rpm)	Exhaust	Chuck	Weight lbs (kg)	Length in (mm)	Air Cons. (cfm)	Avg. Air Cons. (cfm)
UT8891HD	0.45 (0.33)	40:1	500	Rear	1/4" x 28 TPI	1.87 (0.85)	10.25 (260)	16.00	4.00
UT8891HD-10	0.45 (0.33)	20:1	1,000	Rear	1/4" x 28 TPI	1.87 (0.85)	10.25 (260)	16.00	4.00
UT8891HD-24	0.45 (0.33)	9:1	2,400	Rear	1/4" x 28 TPI	1.66 (0.75)	9.75 (248)	16.00	4.00
UT8891HD-33	0.45 (0.33)	6:1	3,300	Rear	1/4" x 28 TPI	1.66 (0.75)	9.75 (248)	16.00	4.00
UT8891HD-45	0.45 (0.33)	5:1	4,500	Rear	1/4" x 28 TPI	1.66 (0.75)	9.75 (248)	16.00	4.00
UT8891HD-60	0.45 (0.33)	3.3:1	6,000	Rear	1/4" x 28 TPI	1.66 (0.75)	9.75 (248)	16.00	4.00

Recommended Air Pressure: 90 PSI (6.2 Bar) | Air Inlet: 1/4" (6.35mm) NPT | Recommended Hose Size: 3/8" (10mm) I.D.

Universal Tool, a Brand of Continental Tool Group, Inc. • 1660 Silver Beach Road, Suite 100, Lake Park, FL 33403
www.UniversalToolUSA • (800) 356-3392

